


RB-37GM

11&12 TYPE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/6~1/10	19.5	1/120~1/300	27.0
1/18~1/30	22.0	1/350~1/1000	29.5
1/36~1/100	24.5	1/1500~1/3000	32.0

外形尺寸 APPEARANCE SIZE

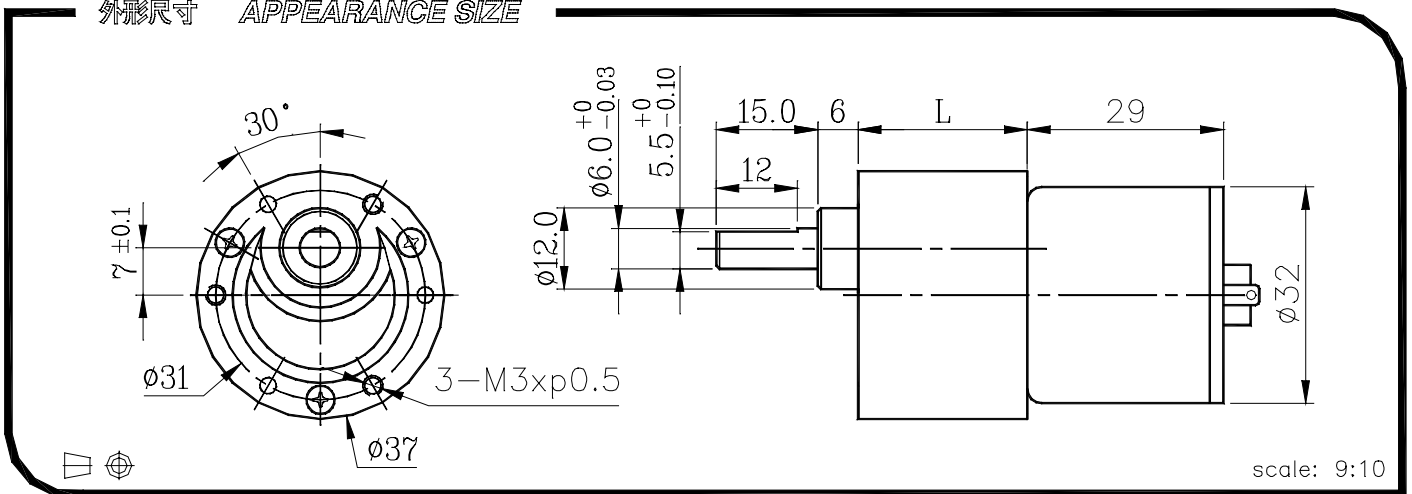

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
		10	18	30	50	60	75	90	100	120	150	180	200	250	300	500	600	750	1000	1500	3000
12V	定格扭力(kg-cm) Rated torque	0.5	0.8	1.3	2.0	2.4	2.9	3.5	3.9	4.2	5.3	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	定格回轉數(rpm) Rated speed	507	278	170	101	84	68	57	51	42.5	34	28.5	26	22	19	11	9.0	7.9	6	4	2
	定格扭力(kg-cm) Rated torque	0.5	0.8	1.4	2.0	2.4	3.0	3.6	4.0	4.4	5.4	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
	定格回轉數(rpm) Rated speed	500	280	164	100	83	67	56	50	41.5	33	28	26	22	19	11	9	7.9	6	4	2

馬達單體型式

MOTOR INSTALLATION

定格電壓 (V) Rated volt	定格扭力 (g-cm) Rated torque	定格回轉數 (rpm) Rated speed	定格電流 (mA) Rated current	無負荷回轉數 (rpm) No load speed	無負荷電流 (mA) No load current	定格出力 (W) Rated output
12	60	5100	470	6200	120	3.14
24	62	5000	210	6200	60	3.17

馬達單體特性圖

MOTOR CHARACTERISTICS

